

Facestock

A bi-axially orientated, gloss polypropylene film with a print receptive top-coat. Very strong and tear resistant.

Basis Weight	122 g/m ²	ISO 536
Caliper	129 µm	ISO 534

Adhesive

A permanent, acrylic based adhesive.

Liner

BG45 white FSC is a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	72 g/m ²	ISO 536
Caliper	63 µm	ISO 534

Laminate

Total Caliper	209 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	14.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-40 °C to 90 °C	

Adhesive Performance

The adhesive is perfectly suitable for uses that need a good resistance to UV, fats or solvents. Good general adhesion performance on a wide range of substrates.

Applications and Use

Face stock properties: high strength, low stretch, good tear resistance.

Special care should be given during dispensing around the gum free area.

Conversion and Printing

The topcoated film can be printed by conventional and digital printing techniques such as UV flexo, UV Inkjet, screen, offset, letterpress, gravure, letterpress and hot or cold foiling processes. The topcoat is designed for optimal ink adhesion with UV-cured inks, including low migration inks, and is compatible with LED curing systems. The face material is suitable for Thermal Transfer printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier. On-press corona treatment is not advised. The material has very good register properties especially when a high number of different colors are used.

The special product lay-out could have an influence on conversion speed.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AJ163

Fasson®

PP125 TOP CLEAR
S697 SGP-BG45WH FSC

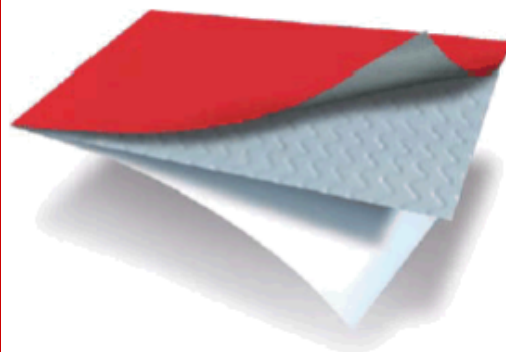

PP125 TOP CLEAR

S697

BG45WH FSC



The mark of
responsible forestry

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000



Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2025 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.