

### Facestock

A bright metallised bi-axially oriented, polypropylene film with a print-receptive topcoat.

Basis Weight	51 g/m <sup>2</sup>	ISO 536
Caliper	51 µm	ISO 534

### Adhesive

A special purpose rubber hotmelt adhesive, featuring high tack and final peel adhesion with extremely high coat weight.

### Liner

BG50 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	78 g/m <sup>2</sup>	ISO 536
Caliper	68 µm	ISO 534

### Laminate

Total Caliper	176 µm±10%	ISO 534
---------------	------------	---------

### Performance Data

Initial Tack	45 N/25mm	FTM 9 Glass
Peel Adhesion 90°	25 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-20 °C to 70 °C	

### Adhesive Performance

TS8000 uses an aggressive formulation developed for labelling rubber with irregular and curved surfaces. It withstands typical chemicals used by tyre manufacturers, such as mould release agents or components migrating from the rubber.

### Applications and Use

Applications are predominantly in market segments where rigid containers are used (e.g. Glass, PET). Applications include luxury products such as spirits, home and personal care, automotive lubricants, where eye catching high quality labels are required. Due to fairly rigid nature of the film care should be taken with use on non-uniform surfaces and where a very high level of squeezability is desired.


The main application for this adhesive is tyre labelling for the production of point-of-purchase labels that are required to adhere to a wide range of tyres, including winter tyres, in a reliable way. This label material does not have any negative effect on the properties and performance of labelled tyres. In addition it is also used in other applications in which a highly aggressive adhesive is needed to label rough surfaces.

Special care should be given during dispensing around the gum free area.

## AQ409

## Fasson®

### PP LIGHT TOP SILVER TS8000 SGP - BG50WH FSC

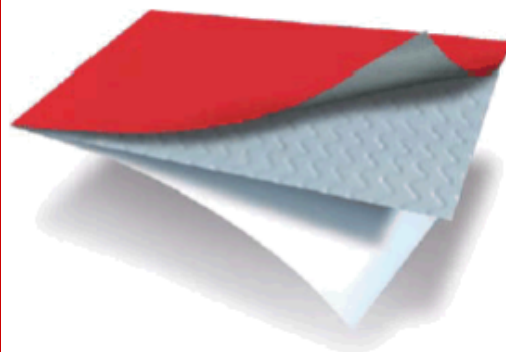

PP LIGHT TOP SILVER

TS8000

BG50WH FSC



The mark of  
responsible forestry

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

### Conversion and Printing

The top coated metallised film can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot or cold foiling processes. UV, water-based and solvent-based inks can be used. The topcoat is designed for optimum ink adhesion. On-press corona treatment is not advised. The face material is suitable for Thermal Transfer printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier. The material has excellent register properties especially when a high number of different colours are used.

The heavy coat weight of adhesive does not allow high press speed. Die cutting and press/inspection rewind tension should be kept under careful control to avoid adhesive bleeding. Automatic dispensing is not recommended, but if necessary, we can adapt a special product.

Note: this product contains a very aggressive adhesive. If the product is without SGP (Special Gum Pattern), adhesive ooze on the sides of the slit rolls can occur. To minimize this risk it is highly recommended to order this material with an adhesive-free zone on each side of the slit rolls (with SGP / gumpattern). Please contact your sales representative for further details.

The special product lay-out could have an influence on conversion speed.

### Compliance and Approvals

Adhesive TS8000 has attained the two star certification for biobased content according to EN 16640, meaning that TS8000 contains certified Biobased Carbon Content of at least 40%. (TÜV AUSTRIA licensee number: S0259)



\*The OK biobased certification is only applicable to the adhesive TS8000.

### Shelf Life

To obtain optimal performance, use this product within one year of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2024 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.